

BAL650C-2 Fluorescent Emergency Ballast 650 Lumens



| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |



STANDARD



ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90 minutes.
- Provides a maximum initial lumen output of 650 lumens.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable Sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL listed for factory or field installation.

HOUSING


- Durable painted steel construction in white finish.
- Provided with 2" flex conduits on both ends.
- Compact design fits most fluorescent fixtures.

WARRANTY/LISTING


- Five year warranty against defects in material and workmanship. (Lamps excluded)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations.

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 13W-26W, 2-pin compact fluorescent lamps with GX23 and G24D bases.



DIMENSIONS

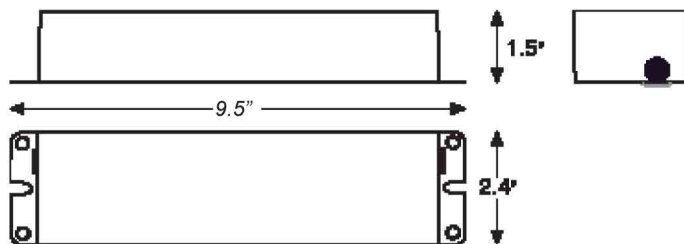

| Lamp | Initial Lumens |
|-----------------|----------------|
| | 1-lamp |
| 2-pin PL CF 13W | 380 |
| 2-pin PL CF 18W | 550 |
| 2-pin PL CF 26W | 650 |

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.